




YOUR STORIES, OUR BLADES

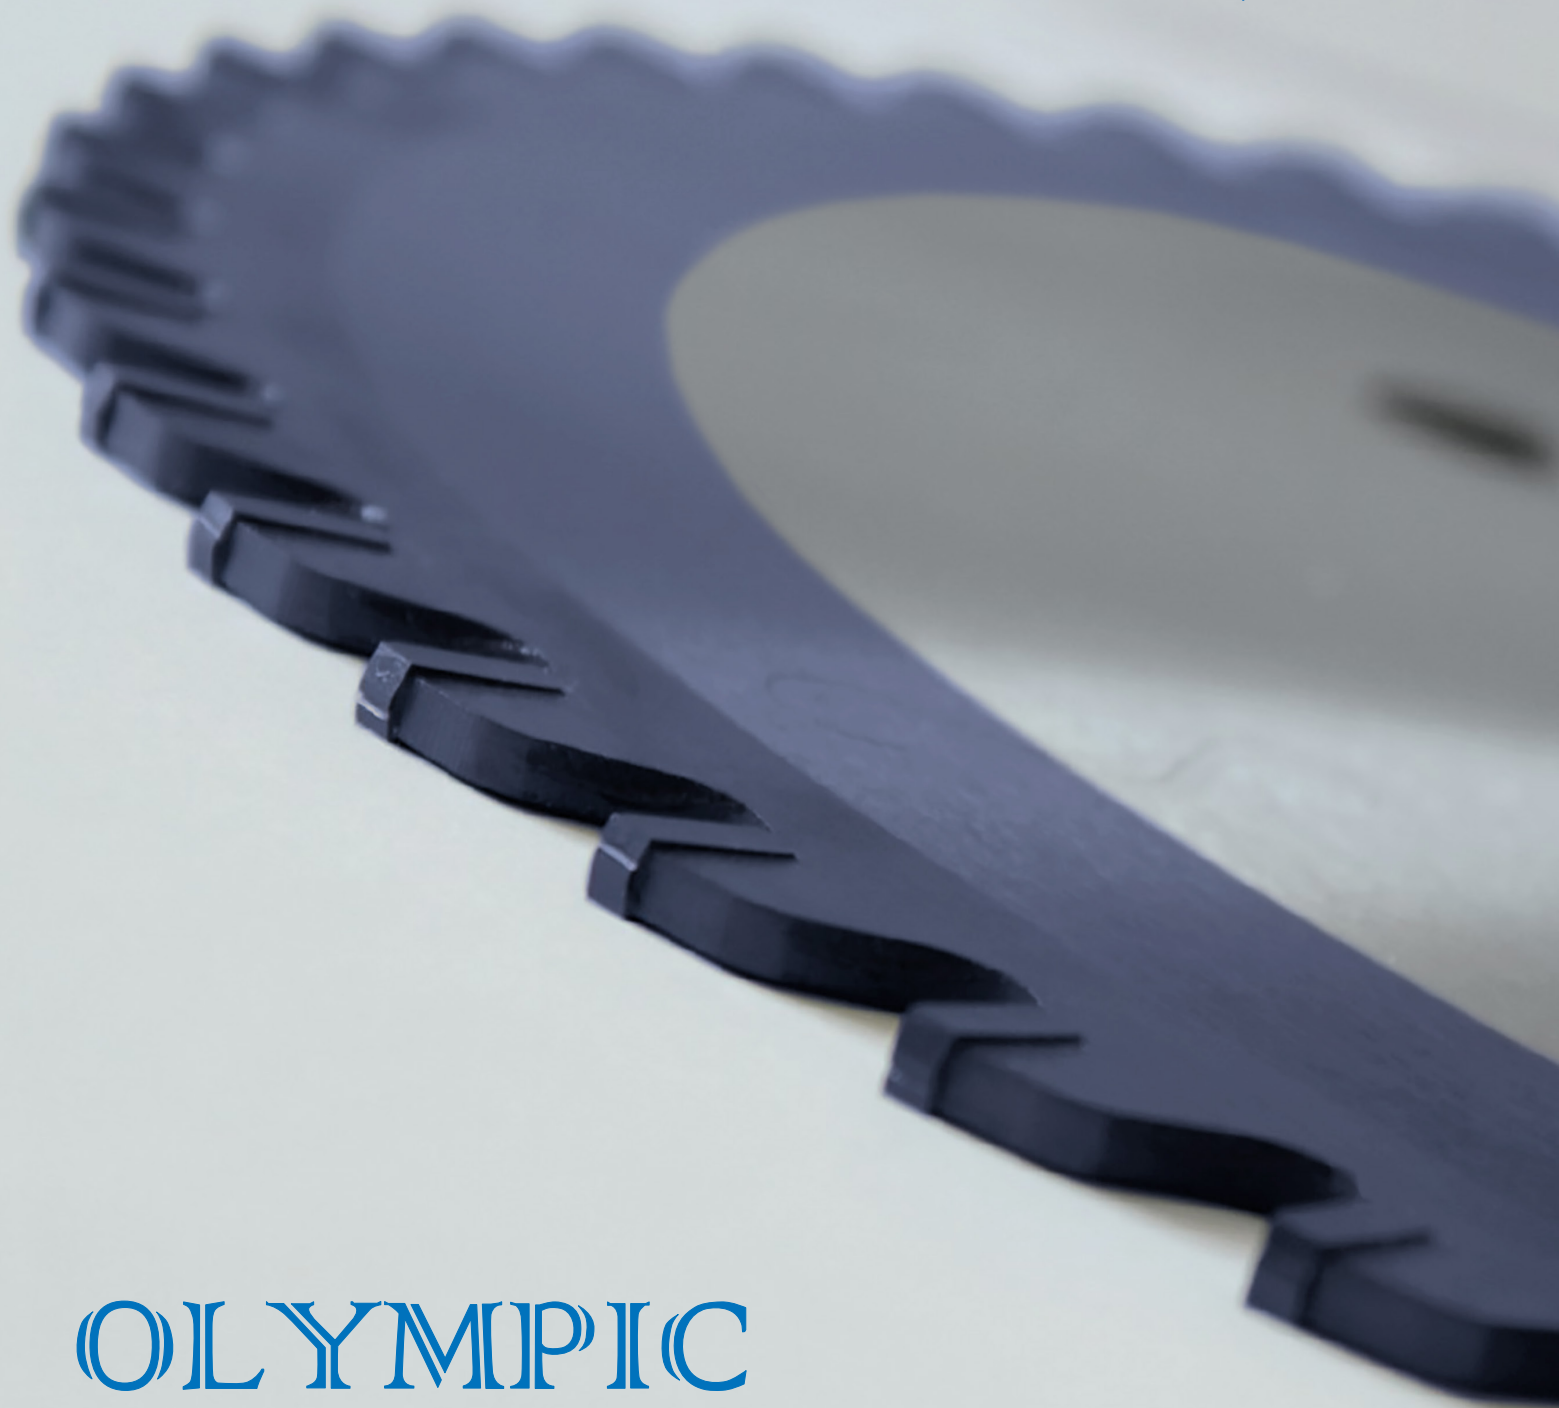

# OLYMPIC

SEGHE CIRCOLARI TCT PER IL TAGLIO DI TUBI

**TCT CIRCULAR SAWS FOR TUBES CUTTING**

HW SÄGEBLÄTTER FÜR STAHL ZUM SCHNEIDEN VON ROHREN



## OLYMPIC 100

Ø [mm]	Spessore Thickness Stärke [mm]	Foro Centrale Central bore Bohrung [mm]	Z
250	2,00 / 1,70	32	80
			100
285	2,00 / 1,70	32 / 40	80
			100
			120
315	2,5 / 2,25	32 / 40	100
			120
			100
350	2,60 / 2,25	32 / 40 / 50	120
			140
			100
360	2,60 / 2,25	40 / 50	120
			140
			120
400	2,60 / 2,25	32 / 40 / 50	140
			160
			120
425	2,70 / 2,25	32 / 40 / 50	140
			160
			120
450	2,70 / 2,25	50	130
			140
			160
460	2,70 / 2,25	50	120
			130
			140
500	2,90 / 2,50	50	160
			140
			170
560	3,50 / 3,00	80 / 90 / 140	120
			140



TAGLIO STATICO DI TUBI  
STATIC TUBES CUTTING  
ROHRE STATISCH SCHNEIDEN

OLYMPIC 100	350x2,6/2,25x32 Z=120
Applicazione <b>Application</b> Anwendung	taglio statico-troncatrice automatica <b>static cut - high performance machines</b> automatisches statisches Rohrschneiden
Materiale <b>Material</b> Werkstoff	<b>P460</b>
Dimensioni <b>Dimensions</b> Größe	<b>40x3,5 mm</b>
Velocità di taglio <b>Cutting speed</b> Schnittgeschwindigkeit	<b>240 m/min</b>
Avanzamento-dente <b>Feed/tooth</b> Vorschub pro Zahne	<b>0,03 - 0,10 mm/z</b>
Resa lama <b>Blade life</b> Blattergebnis	<b>12.0 m<sup>2</sup></b>

## OLYMPIC 300

Ø [mm]	Spessore Thickness Stärke [mm]	Foro Centrale Central bore Bohrung [mm]	Z
315	2,90 / 2,50	32 / 40	100
			110
360	2,90 / 2,50	40 / 50	100
			120
400	2,90 / 2,50	40 / 50 / 80	100
			120
			130
			140
425	2,90 / 2,50	50	120
			140
			120
450	2,90 / 2,50	50 / 80	130
			140
			150
			160
500	3,50 / 3,00	50 / 80	120
			130
			140
			150
550	3,80 / 3,30	50 / 80 / 90 / 140	160
			170
			120
			140
560	3,80 / 3,30	50 / 80 / 90 / 140	150
			160
			170
			120
600	3,80 / 3,30	80 / 90 / 140	140
			150
			170
			180
650	3,80 / 3,30	80	120
			150
			170
690	3,80 / 3,30	50 / 80	140
			150



TAGLIO VOLANTE DI TUBI  
TUBES FLYING CUTTING  
ROHRE FLIEGEND SCHNEIDEN

OLYMPIC 300	500x3,5/3,0x50 Z=140
Applicazione <b>Application</b> Anwendung	taglio volante di tubi non scordonati internamente <b>flying cut with no ID scarfing</b> Fliegendes mitlaufendes Schneiden
Materiale <b>Material</b> Werkstoff	<b>S355JR</b>
Dimensioni <b>Dimensions</b> Größe	<b>89x4,6 mm</b>
Velocità di taglio <b>Cutting speed</b> Schnittgeschwindigkeit	<b>370 m/min</b>
Avanzamento-dente <b>Feed/tooth</b> Vorschub pro Zahne	<b>0,04 - 0,10 mm/z</b>
Resa lama <b>Blade life</b> Blattergebnis	<b>10.0 m<sup>2</sup></b>

## OLYMPIC 300S

Ø	Spessore Thickness Stärke	Foro Centrale Central bore Bohrung	Z
[mm]		[mm]	
315	2,90 / 2,50	32 / 40	100
			110
350	3,60 / 3,20	50	100
			120
360	2,90 / 2,50	32 / 40 / 50	100
			120
400	3,60 / 3,20	50	120
			140
450	3,60 / 3,20	50	140
			150
500	3,60 / 3,20	50	120
			130
			140
			150
			160
			170
550	3,60 / 3,20	80 / 90 / 140	120
			140
560	3,60 / 3,20	80 / 90 / 140	170
			120
600	3,60 / 3,20	80 / 90 / 140	140
			170
			120
			180



TAGLIO DI TUBI SCORDONATI  
SCARFED TUBES CUTTING  
GESCHWEISSTEN ROHREN

OLYMPIC 300S	560x3,6/3,2x140 Z=170
Applicazione <b>Application</b> Anwendung	taglio volante di tubi scordonati internamente <b>flying cut with ID scarfing</b> Fliegendes geglättetes Schneiden
Materiale <b>Material</b> Werkstoff	S235JR
Dimensioni <b>Dimensions</b> Größe	127x6 mm
Velocità di taglio <b>Cutting speed</b> Schnittgeschwindigkeit	400 m/min
Avanzamento-dente <b>Feed/tooth</b> Vorschub pro Zahne	0,02 - 0,05 mm/z
Resa lama <b>Blade life</b> Blattergebnis	6.2 m <sup>2</sup>

## OLYMPIC 500

Ø	Spessore Thickness Stärke	Foro Centrale Central bore Bohrung	Z
[mm]		[mm]	
250	3,80 / 3,00	45	60
300	3,80 / 3,00	80	44
			52
			60
			72
315	3,50 / 2,70	50	80
			60
			70
			80
350	3,50 / 2,70	50	90
			50
			60
			70
			80
			90
355	2,90 / 2,25	45	100
			60
			70
			80
380	3,80 / 3,00	115	90
			52
			70
400	3,80 / 3,00	115	100



TAGLIO ORBITALE DI TUBI  
ORBITAL TUBES CUTTING  
ORBITALES ROHRSCHEIDEN

OLYMPIC 500	315x3,5/2,7x50 Z=90
Applicazione <b>Application</b> Anwendung	taglio volante su troncatrice orbitale <b>flying cut with orbital machines</b> Fliegendes orbitales Schneiden
Materiale <b>Material</b> Werkstoff	SS400
Dimensioni <b>Dimensions</b> Größe	219x4,5 mm
Velocità di taglio <b>Cutting speed</b> Schnittgeschwindigkeit	380 m/min
Avanzamento-dente <b>Feed/tooth</b> Vorschub pro Zahne	0,04 - 0,12 mm/z
Resa lama <b>Blade life</b> Blattergebnis	8.5 m <sup>2</sup>





YOUR STORIES, OUR BLADES



## HEADQUARTERS

### STARK S.p.A.

Strada Triestina, 8  
33050 Trivignano Udinese (Udine), Italy  
Phone +39 0432 998811  
Fax +39 0432 999097 / 999552  
E-mail: [info@starktools.com](mailto:info@starktools.com)  
<http://www.starktools.com>

## BRANCHES

### Vertriebsgesellschaft STARK GmbH & Co.

Robert Bosch Strasse, 47  
73431 Aalen, Germany  
Tel. +49(0) 7361-55647-0  
Fax +49 (0) 7361 55647-48  
E-mail: [post@starktools.de](mailto:post@starktools.de)  
[http:// www.starktools.de](http://www.starktools.de)

### STARK TOOLS (Suzhou) Co., Ltd.

No. 17, Jinfeng Road  
Nanfeng Town - Zhangjiagang City, Jiangsu  
P.R.China (215628)  
Phone +86 (0) 512 58907826/28  
Fax +86 (0) 512 58907827  
E-Mail: [stark@starktools-cn.com](mailto:stark@starktools-cn.com)  
[http:// www.starktools.cn](http://www.starktools.cn)